Communication.

Target Audience. Fitters/Loose lifting/Managers

Subject: Alteration to Flail PDI sheet 5-2-19 (Additional check box to highlight guard is fitted and correct.)

Be advised that QF060 ISSUE 3, Must now be used when Pre-dispatch inspecting flails.

An additional box is now included that can be seen on the second page of this brief. (Seen in Red)

Machine windscreen guard is in good condition and correctly fitted to the host machine.

Always ensure you are using the correct documents.

Always follow the prompts on the documents, and mark them clearly and accurately.

Always sign and date them.

If unsure always ask a supervisor.

Always work safe and use the appropriate PPE.

Act Safely Behave Correctly Communicate Effectively

	_			
п			Plant	
	_		PIOAL	



APW-QF-060: FLAILS PRE HI	RE & SERVICE RECORD
---------------------------	---------------------

Reference material Operating & Maintenance Manual Osma / Moonnel


HOST MACHINE...... FITTERS NAME

√=Serviceable X=None Serviceable N/A=Not applicable

CHECK AND INSPECT	√x N/A	CHECK AND INSPECT	√N/AX
Check shaft securing bolts.		Hydraulic hoses and couplings.	
Check flail securing bolts.		Attachment head / Cracks and welds.	
Check for any damage.		Rotor bearings for play.	
All guards in place and functional on flail	3	Run and test. (Adhere to safe system of work).	
Machine windscreen guard is in goo condition and correctly fitted to host machine		Grease all relevant points	
Check rubber skirts front and rear.		Inspect certification is present and correct.	
Check rear roller condition bearings etc.			

IF A CROSS IS PLACED IN ANY BOX AND THE FAULT IS NOT RECTIFIED, DETAILS MUST BE ENTERED BELOW. THIS MUST THEN BE HANDED INTO THE OFFICE.

DEFECTS TO REPORT

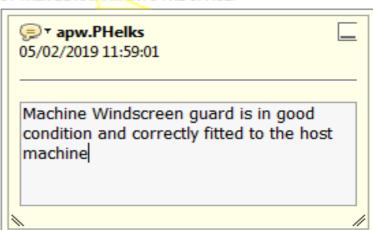

ACTION TAKEN

December 1991 APPLY OF SCO	Destauration Citizates
PRINT NAME:	 Date:
AUTHORISED SIGNATURE	
PRINT NAME:	 Date:
FITTERS SIGNATURE:	

Document Ref. APW-QF-060 Effective from: February 2019 Page 1 of 1